


Example 使用例

注:每套斜頂裝置含:斜頂、斜頂滑塊、斜頂座三個零件
 Note:every unilifter include:oblique plate,slide,slide block,oblique base three parts.

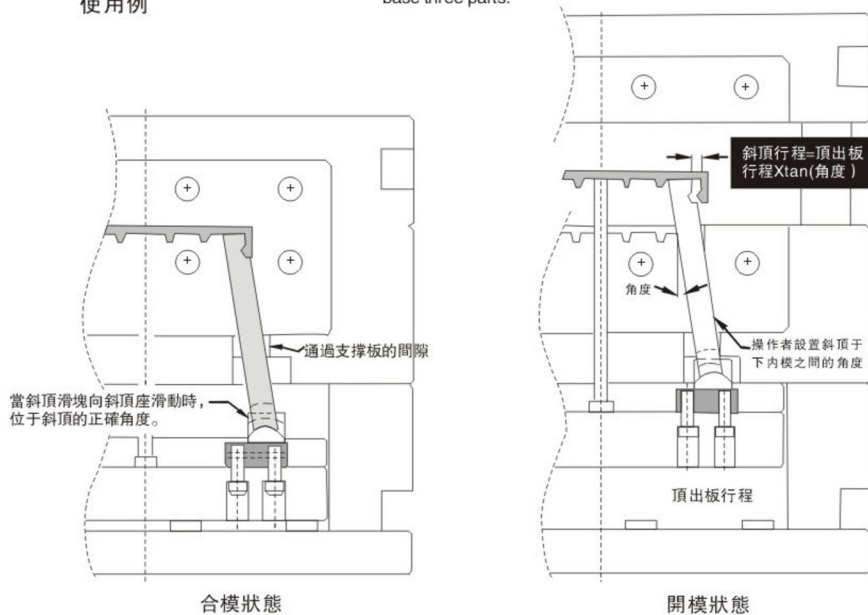

Application Guidelings

1. Typical angle is $5-10^\circ$, though users report success at greater angles with guides installed. contact engineering for application review.
2. guided ejection is recommended, an if there is less than half of the core blade bearing in the insert, lifter guide plates should be added.
3. recommended clearance is .001"-.0015"(.025-.038mm) where permissible.
4. verify that the core insert material is at least 10hrc sifferent than standard core blades, and for additional performance, consider coatings or treatments for increased hardness of lubricity.
5. locking angles can be designed to accept molding pressure..